

CAT.6A Keystone Jack

Standards

- TIA/EIA 568-C2
- ISO/IEC 11801 2nd version
- EN 50173-1: 2002

Certificate

- UL cUL
- ETL

Features

- T-568A/B wiring
- RJ 45 complies with FCC
- part 68 standard.
- 110 IDC universal
- IDC connector
- Provides termination for
- 22~26 AWG wire

Applications


- 10G BASE-T
- Gigabit Ethernet
- ATM155/622MHz 1.2/2.4GHz
- 2 / 4G FCBASE-T
- ADSL
- ISDN

Specifications


- Housing is fire-resistance ABS
- Contacts are 50u" gold-plated
- Insertion life cycles >800
- IDC insertion life cycles >200
- Contact resistance : 20M ohm
- Current rating : 1.5Amps
- DC resistance: Max.0.1ohm
- Operating temperture:
- -40~+60 C degrees



CAT.6A STP 6 point
channel ETL Verified

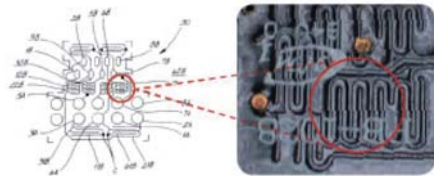

Patented PCB circuit
provides excellent work in easing
internal magent coupling to 500MHz

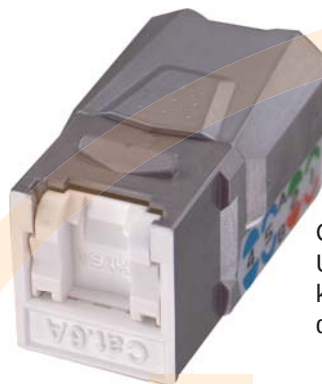

CAT.6A channel compliant
UTP right-angled shuttered
keystone jack,100/KRONE
dual IDC